

PIVOT Sconce
3-405-xxxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-1540 Black/Aged Brass




-40 Aged Brass



-640 White/ Aged Brass

LIGHT SOURCE	(1x) 7.5W LED Array, 3000K, CRI 90
LUMINAIRE POWER	8.48W
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	Field Selectable 3000K/3500K/4000K CCT Note: Oxygen Standard setting is 3000K
LUMEN OUTPUT	416.6 Lm (LM-79)
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	13.5W
DIMMING	Triac dimming 10-100%
CONSTRUCTION	Cold Rolled Steel
DIFFUSER	Formed painted steel
FINISHES	40 Aged Brass, 640 White/Aged Brass, 1540 Black/Aged Brass
MOUNTING	Installs to a 4" octagonal junction box
STANDARDS	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

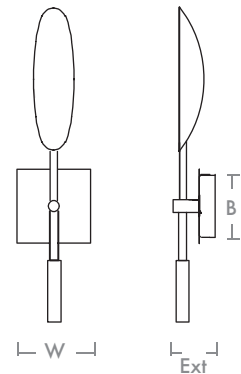

DIMENSIONS

W:	5.75"
H:	24"
B (Backplate):	4.75" x 4.75"
Ext:	3.125"
M.C:	15" From top of fixture

Order example for standard fixture:

3-405-1540 (x-xxx: LED Sequence # / -xx: Finish)

Order example for optional color temperatures: **3-6017-**

27: 2700K, **35:** 3500K, **40:** 4000K

