

PIVOT Pendant

3-408-xxxx


oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____

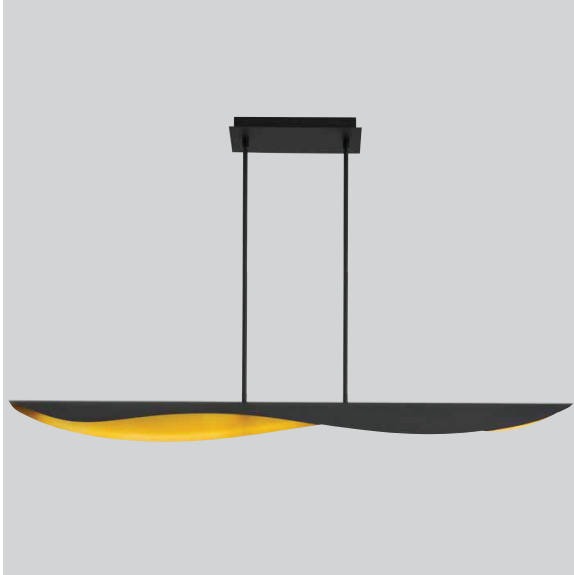

-1540 Black




-40 Aged Brass



-640 White / Aged Brass

LIGHT SOURCE	(1x)32W LED Array, 3000K, CRI 90
LUMINAIRE POWER	31.47W
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000/3500/4000K CCT
LUMEN OUTPUT	1656.9 Lm (LM-79)
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	56.5W
DIMMING	Triac dimming 10-100%
CONSTRUCTION	Cold Rolled Steel
DIFFUSER	Matte White Acrylic Diffuser.
FINISHES	40 Aged Brass, 640 White/Aged Brass, 1540 Black/Aged Brass
MOUNTING	Installs to a 4" octagonal junction box
STANDARDS	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

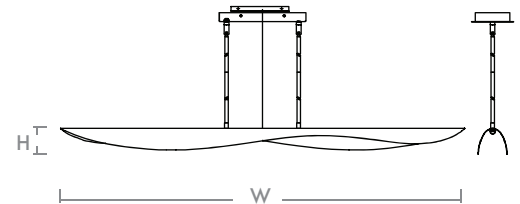

DIMENSIONS

W: 55"
H: 3.5"
OAH: Adjustable using provided rods (2)8" Long, (2)12" L, (3)16" L.

Order example for standard fixture:

3-408-1540 (x-xxx: LED Sequence # / -xx: Finish)

Order example for optional color temperatures: **3-6017-**

27: 2700K, **35:** 3500K, **40:** 4000K

