


**CIRRO Pendant**  
**3-60-xx**

oxygen


FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-6 White

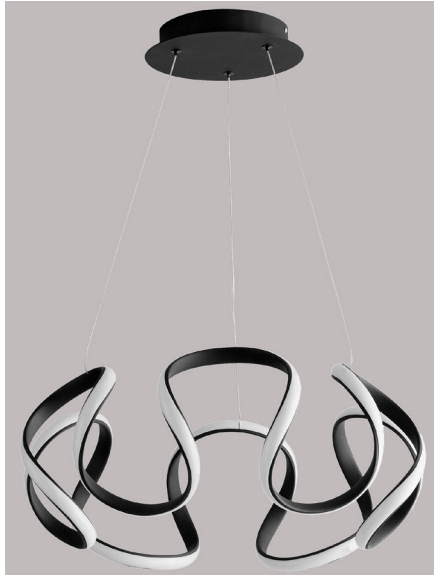


-15 Black

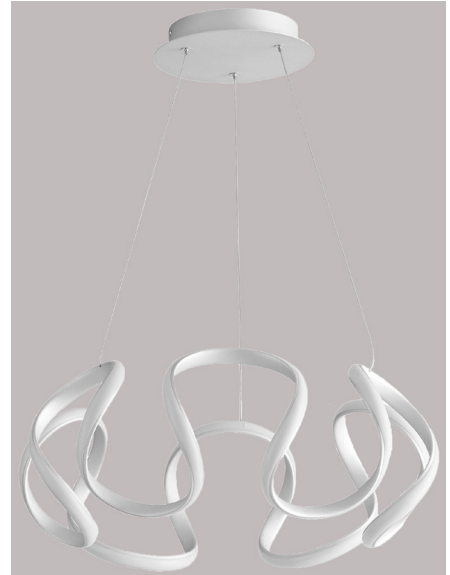

-30 Silver Graphite

<b>LIGHT SOURCE</b>	LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	39.2W at 120V
<b>RATED LIFE</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 2936 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	1200mA, 35.7W
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Canopy, Formed Aluminum Housing
<b>DIFFUSER</b>	- Flexible Matte White Silicone
<b>FINISHES</b>	White (-6), Black (-15), Silver Graphite (-30)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

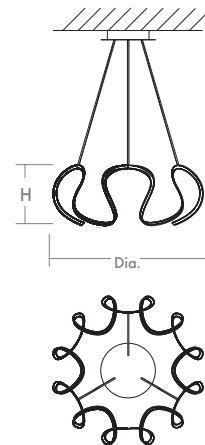

**DIMENSIONS**

**Dia. Fixture: 22.00"**  
**H. Fixture: 7.75"**  
**\* Hanging height adjustable with 8ft. cables**

Order example for standard fixture:  
**3-60-15** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

