

RUVO Pendant

120v : **3-6202-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-25 Satin Copper

-22 Oiled Bronze

-24 Satin Nickel

| | |
|------------------------|---|
| LIGHT SOURCE | 1 x 24W LED max. Medium Base PAR20/30/38; Medium Base A19, A21. (Lamp not included) |
| LUMINAIRE POWER | Power varies based on lamp used |
| RATED LIFE | See LED bulb manufacturer specification |
| LUMEN OUTPUT | Lumen output varies based on lamp used |
| INPUT VOLTAGE | 120V |
| DRIVER OUTPUT | N/A |
| CONSTRUCTION | Plated Steel and Glass |
| DIFFUSER | - White Tiffany Glass |
| FINISHES | Oiled Bronze (-22), Satin Nickel (-24), Satin Copper (-25) |
| MOUNTING | 4" Octagonal J-Box |
| STANDARDS | UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0. |

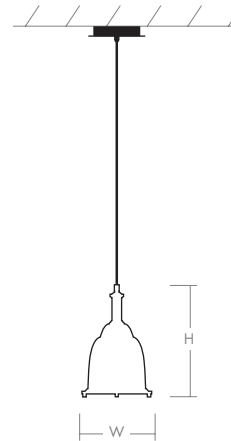

DIMENSIONS

Dia. Canopy: 6.50"

Dia. Fixture: 10.50"

H. Fixture: 16.50"

Suspension Length: Up to 60"

Note: Customer must specify desired length of downrod.

Order example for standard fixture:

3-6202-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v

