

# MARIA Pendant

3-663-xxxx

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-1540 Dark Gray/Aged Brass Lit



-1624 Gray/Satin Nickel

- LIGHT SOURCE (Not Included)** Medium Base Socket  
1x 24W max PAR20/30/38, A19, A21  
**Lamp Not Included**
- LUMINAIRE POWER** Fixture certified for use with 24W medium base LED lamp
- INPUT VOLTAGE** 120V AC, 50/60Hz
- CONSTRUCTION** Concrete and Steel
- DIFFUSER** - Concrete
- FINISHES** Dark Gray/Aged Brass (-1540),  
Gray/Satin Nickel (-1624)
- MOUNTING** 4" Octagonal J-Box  
\*Junction box must be securely mounted to building structure  
and capable of supporting at least 50 pounds.
- STANDARDS** cUL Damp Listed, Conforms to UL STD 1598,  
Certified CAN/CSA STD C22.2 No 250.0.

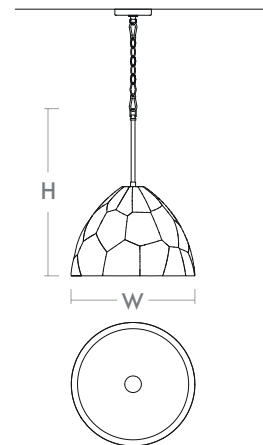

## DIMENSIONS

**Dia. Fixture:** 16.00"

**H. Fixture:** 21.875"

\* Measured using 1-8" stem for  
minimum hanging height

**Weight:** 31.5 lbs.

Supplied with 2-8", 2-12", and 2-16"  
stems plus 1' of chain

Order example for standard fixture:  
**3-663-1540** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

