

# ETHOS Pendant

## 3-6714 -15

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-15 Black

<b>LIGHT SOURCE</b>	(12x) 6W LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	TBD
<b>RATED LIFE</b>	50000 hr RL
<b>COLOR TEMPERATURES</b>	Field Selectable 3000K/3500K/4000K CCT LED Note: Oxygen Standard setting is 3000K
<b>LUMEN OUTPUT</b>	TBD Lm (LM-79)
<b>INPUT VOLTAGE</b>	120-277V
<b>DRIVER OUTPUT</b>	TBD
<b>DIMMING</b>	10-100%
<b>CONSTRUCTION</b>	Steel , Glass
<b>DIFFUSER</b>	Clear Seeded Glass
<b>FINISHES</b>	-15 Matte Black
<b>MOUNTING</b>	Unit Mounts to a 4" Octagonal J box
<b>STANDARDS</b>	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 NO. 250.0

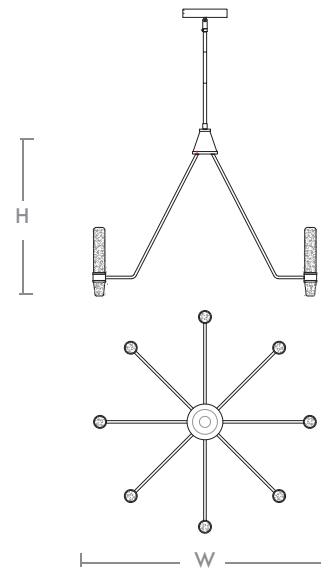

### DIMENSIONS

**W:** 32"  
**H:** 24.5"  
**OAH:** Adjustable Using 8", 12", 16"  
 Rod Segments (Included)

Order example for standard fixture:  
**3-6714-XX** (x-xxx: LED Sequence # / -xx: Finish)

