


LUNA Pendant
3-673-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____



LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.4 W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 740 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Opal Glass
FINISHES	Black (-15) Polished Nickel (-20), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring * Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

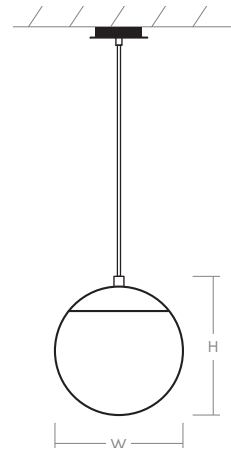

DIMENSIONS
Dia. Canopy: 5.88"
W. Fixture: 12.00"
H. Fixture: 13.75"
Supplied with 10 ft braided cord

Order example for standard fixture:
3-673-24 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V
Order example for optional color temperatures: **3-673-2724**
27: 2700K, 35: 3500K, 40: 4000K

