

**RICKIE Outdoor**  
**3-765-15**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-15 Black

|                                    |   |
|------------------------------------|---|
| <b>LIGHT SOURCE</b>                | (12x) 1.5w LED Arrays, 3000K, CRI 90  |
| <b>LUMINAIRE POWER</b>             | 11.7W at 120V   |
| <b>RATED LIFE</b>                  | 50000 hr RL   |
| <b>OPTIONAL COLOR TEMPERATURES</b> | 3000K Only  |
| <b>LUMEN OUTPUT</b>                | Initial: 1200 lm  |
| <b>INPUT VOLTAGE</b>               | 100V to 277V AC, 50/60Hz  |
| <b>DRIVER OUTPUT</b>               | 450mA, 18W max power  |
| <b>DIMMING</b>                     | Non-dimmable  |
| <b>CONSTRUCTION</b>                | Cast Aluminum Housing   |
| <b>DIFFUSER</b>                    | - Clear Glass   |
| <b>FINISHES</b>                    | Black (-15)   |
| <b>MOUNTING</b>                    | 4" Octagonal J-Box<br>(Installer must provide a bead of caulk between fixture housing and mounting surface) |
| <b>STANDARDS</b>                   | ETL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.               |

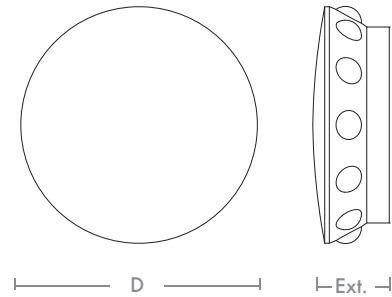

**DIMENSIONS**  
**Dia.:** 8.00"  
**Ext:** 2.5"  
**M.C:** 4" From top of fixture

