

ELAN Pendant
3-877-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-15 BK



-40 AGB

LIGHT SOURCE	20W LED Array, 3000K CRI 90
LUMINAIRE POWER	TBD
RATED LIFE	50000 hr RL
COLOR TEMPERATURE	Field Selectable 3000K/3500K/4000K CCT Note: Oxygen Standard setting is 3000K
LUMEN OUTPUT	TBD (Lm-79)
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	TBD
DIMMING	Trailing Edge dimming 100% -1%
CONSTRUCTION	Steel, Glass
DIFFUSER	Clear Cut Glass
FINISHES	-15 Black , -40 Aged Brass
MOUNTING	Installs to a 4" octagonal junction box
STANDARDS	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

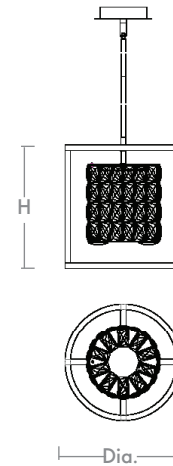

DIMENSIONS

Dia.: 12"
H: 13"
OAH: Adjustable using 8", 12", 16" rods (Included)

Order example for standard fixture:
3-877-XX (x-xxx: LED Sequence # / -xx: Finish)

