

# ELLIPSE Wall Sconce

3-567-xxx

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-24 Satin Nickel



-15 Black



-24 Satin Nickel





-1 White Opal Glass



-2 Matte White Acrylic

<b>LIGHT SOURCE</b>	1 x 6.2W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	7.1W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: (-1) Glass: 132 lm (LM-79) Delivered: (-2) Acrylic: 157 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	180mA, 7.6W max
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
<b>CONSTRUCTION</b>	Plated Steel and Acrylic / Glass
<b>METAL FINISH / DIFFUSER</b>	(-115) White Opal Glass / Black (-120) White Opal Glass / Polished Nickel (-124) White Opal Glass / Satin Nickel (-215) Matte White Acrylic / Black (-220) Matte White Acrylic / Polished Nickel (-224) Matte White Acrylic / Satin Nickel
<b>MOUNTING</b>	4" Octagonal J-Box* 4"x4" Square J-Box* 4"x4" Square J-Box* with single device mud ring *Deep J-Box (Required to house driver)
<b>STANDARDS</b>	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

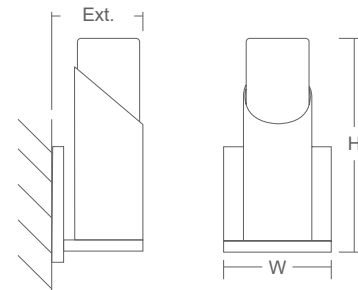

**DIMENSIONS**

**W: 4.75"**  
**H: 9.625"**  
**Ext: 4.00"**  
**M.C: 7.50" From Top of Fixture**

**NOTE:** Adjustable (360° rotating) threads allow for the diffuser to be mounted facing any direction desired. Diffuser can be faced forwards, backwards, or any other direction on a 360° axis.

Order example for standard fixture:

**3-567-xxx** (x-Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

Order example for optional color temperatures: **3-567-27124**

**27:** 2700K, **35:** 3500K, **40:** 4000K

