

VIVO 5LT LED Pendant
3-810-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-15 Black



-15 Black



-40 AGB

LIGHT SOURCE (1) X 5W LED Array, Selectable Color Temp, CRI 90

LUMINAIRE POWER XXXXXX Input Power

RATED LIFE 50000 hr RL

OPTIONAL COLOR TEMPERATURES Selectable **(CCT)** 3000/3500/4000K

LUMEN OUTPUT TBD

INPUT VOLTAGE 120V

DRIVER OUTPUT TBD

DIMMING TRIAC and ELV dimming at 120V AC


CONSTRUCTION Cold Rolled Steel Housing

DIFFUSER -Clear with White Faceted Glass

FINISHES -15 Black, -40 AGB

MOUNTING 4" Octagonal J-Box

STANDARDS ETL Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

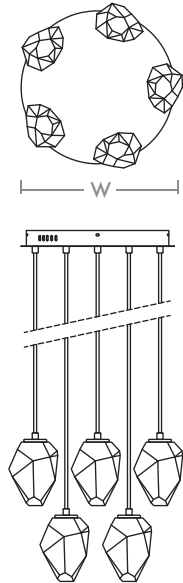

DIMENSIONS

W: 15.25"
H:
Ext:
M.C: X" From top of fixture

Note:

Order example for standard fixture:
3-810-15 (x-xxx: LED Sequence # / -xx: Finish)

