

# VEER 5LT 5CCT Pendant 3-6102-xx

oxygen

FIXTURE TYPE \_\_\_\_\_  
PROJECT \_\_\_\_\_

LOCATION \_\_\_\_\_  
DATE \_\_\_\_\_




-15 Black



-40 Aged Brass

|                           |                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------|
| <b>LIGHT SOURCE</b>       | (5) 6.4 Watt LED Array 90CRI                                                             |
| <b>LUMINAIRE POWER</b>    | 35.58W                                                                                   |
| <b>RATED LIFE</b>         | 50000 hrs RL                                                                             |
| <b>COLOR TEMPERATURES</b> | Field Selectable 2700/3000/4000/<br>5000/6500 CCT<br>Note: Oxygen standard setting 3000k |
| <b>LUMEN OUTPUT</b>       | 1606.6 (lm-79)                                                                           |
| <b>INPUT VOLTAGE</b>      | 120V AC                                                                                  |
| <b>DRIVER OUTPUT</b>      | 45W Max                                                                                  |
| <b>DIMMING</b>            | TRIAC Dimming                                                                            |
| <b>CONSTRUCTION</b>       | CRS/Glass                                                                                |
| <b>DIFFUSER</b>           | Textured Glass                                                                           |
| <b>FINISHES</b>           | -15 Black, -40 Aged Brass                                                                |
| <b>MOUNTING</b>           | Unit mounts to a 4" Octagonal J-Box                                                      |
| <b>STANDARDS</b>          | Damp Listed, Conforms to<br>UL STD 1598, Certified CAN/CSA STD C22.2 No<br>250.0.        |

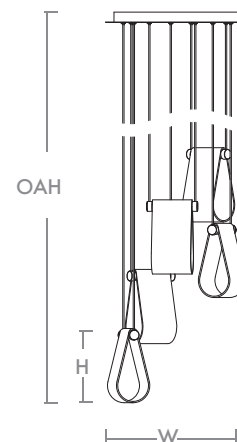

**DIMENSIONS**  
**W:** 20"  
**H:** 9.75"  
**OAH:** Adjustable

Order example for standard fixture:  
**3-6102-XX** (x-xxx: LED Sequence # / -xx: Finish)

