

GAMMA 6Lt 5CCT Pendant

3-650-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-15 Black



-56 Brushed Brass

LIGHT SOURCE	(6) 5 Watt LED Array 90CRI
LUMINAIRE POWER	TBD
RATED LIFE	50000 RL
COLOR TEMPERATURES	Field Selectable 2700/3000/4000/ 5000/6500 CCT Note: Oxygen standard setting 3000k
LUMEN OUTPUT	
INPUT VOLTAGE	120 - 277V AC
DRIVER OUTPUT	TBD
DIMMING	TRIAC dimming
CONSTRUCTION	CRS/Glass
DIFFUSER	Glass
FINISHES	-15 Black, -56 Brushed Brass
MOUNTING	Unit Mounts to a 4" Octagonal J-Box.
STANDARDS	Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

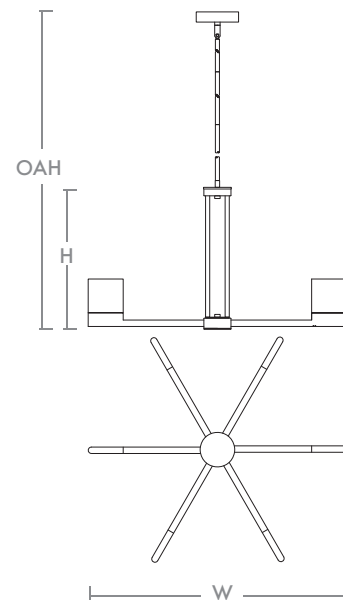

DIMENSIONS

W: 30"

H: 17"

OAH: Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height.

Order example for standard fixture:

3-650-24 (x-xxx: LED Sequence # / -xx: Finish)

