

EROS 3CCT Pendant

3-659-xx

oxygen

FIXTURE TYPE _____
PROJECT _____

LOCATION _____
DATE _____




-15 Black



-56 Brushed Brass

LIGHT SOURCE	(1) 20 Watt LED Array 90CRI
LUMINAIRE POWER	20.57 W
RATED LIFE	50000 hrs RL
COLOR TEMPERATURES	Field Selectable 3000/3500/4000 CCT Note: Oxygen standard setting 3000k
LUMEN OUTPUT	619.2 Lm (Lm-79)
INPUT VOLTAGE	120 - 277V AC
DRIVER OUTPUT	26W, 650mA mA _X
DIMMING	Triac Dimming
CONSTRUCTION	CRS/Glass
DIFFUSER	Clear Glass
FINISHES	-15 Black, -56 Brushed Brass
MOUNTING	Mounts to a 4" Octagonal J-Box.
STANDARD	Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

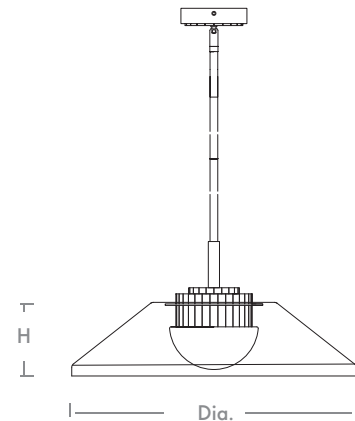

DIMENSIONS

Dia.: 22"
H: 11"
OAH: Fixture Supplied w/ 2-8"
2-12" and 3-16" Stems to
Customize hanging ht.

Order example for standard fixture:
3-659-15 (x-xxx: LED Sequence # / -xx: Finish)

