


## ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.


NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.






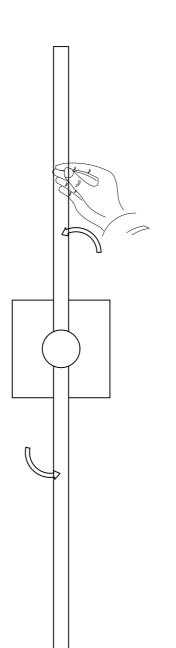







- Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
- 2. Remove fixture screws to release mounting plate. If necessary, set the desired angle of light rod by loosening the hex nuts inside the fixture housing. Light rod can swivel 45° left or right of center. DO NOT swivel light bar beyond 45° as not to damage the LED module and wiring. Set the desired angle and tighten hex nuts to secure the angle.
- 3.Thread building wires through mounting plate, then secure mounting plate with tapping screws and j-box screws.
- I.Make wire connections
- Refer to driver label for wire identification.
- Attach ground wire to the mounting plate with a green ground screw, then connect building ground wire using a wire nut.

  Attach white wire (neutral) from driver to white wire
- from building using a wire nut.

   Attach black wire (hot) from driver to black wire from
- building using a wire nut.

  Tuck the wire connections neatly into the junction box
- 5. Place fixture over mounting plate and reinstall fixture screws to securely mount fixture to wall.
- 6. Turn on the power at fuse or circuit box.

**OXYGEN LIGHTING ©** 

**ZORA** Vanity 3-53-1550 / 3-53-650 3-54-1550 / 3-54-650

**ASSEMBLY INSTRUCTIONS** 

OXYGEN LIGHTING | 201 RAILHEAD ROAD, FORT WORTH, TX 76106 | TEL. (877) 6070202 | FAX (877) 6070203 | www.oxygenlighting.com